



Aluminium Trussing





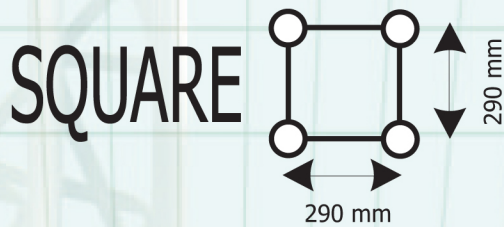

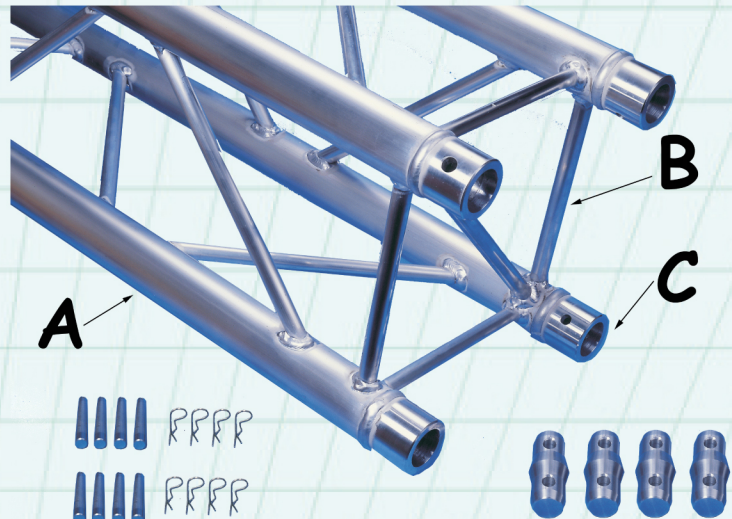



PAZ 290

- A Tube diameter 50 mm
thickness 2 mm
- B Rod diameter 16 mm
- C Conical Couplers



Please contact us for details

-  Medium duty truss
-  Quick, easy and secure connection system
-  Spigot couplers, conical pins and R-Pins
-  No Nuts & Bolts, no spanners, no special tools required
-  Ideal for exhibitions, event productions and touring
-  All standard angles immediately available
-  Custom sections and curves available on short notice
-  Other sizes now available - including 222, 390, 400 sections

Load on the total length



x 3 m	1367.4 kg
x 6 m	1085.4 kg
x 9 m	726.3 kg
x 12 m	535.2 kg

Centred load



x 3 m	632.2 kg
x 6 m	460.0 kg
x 9 m	348.3 kg
x 12 m	276.5 kg

Truss weight : 5,9 kg / m

0,30 m	Ref. PAZ29050
0,71 m	Ref. PAZ29071
1,00 m	Ref. PAZ29100
1,50 m	Ref. PAZ29150
2,00 m	Ref. PAZ29200
2,50 m	Ref. PAZ29250
3,00 m	Ref. PAZ29300
4,00 m	Ref. PAZ29400
5,00 m	Ref. PAZ29500

 Ref. PAZC290
Coupler sets Ref. KZ290