



Aluminium Trussing

TRIANGULAR



PAX 290

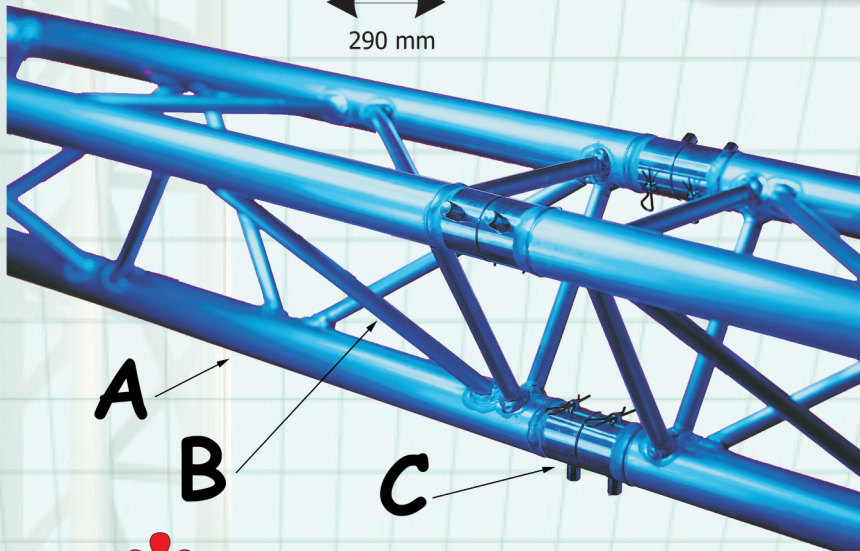

- A Tube diameter 50 mm
thickness 2 mm
- B Rod diameter 16 mm
- C Conical couplers

- * Medium duty truss
- * Quick, easy and secure connection system
- * Spigot couplers, conical pins and R-Pins
- * No Nuts & Bolts, no spanners, no special tools required
- * Ideal for exhibitions, event productions and touring
- * All standard angles immediately available
- * Custom sections and curves available on short notice

Truss weight : 4,5 kg / m

Load on the total length




x 3 m	1260 kg
x 6 m	972 kg
x 9 m	531 kg
x 12 m	240 kg

Centred load



x 3 m	345 kg
x 6 m	265 kg
x 9 m	183 kg
x 12 m	148 kg

0,30 m	Ref. PAX29030
0,50 m	Ref. PAX29050
0,71 m	Ref. PAX29071
0,742 m	Ref. PAX29074
1,00 m	Ref. PAX29100
1,50 m	Ref. PAX29150
2,00 m	Ref. PAX29200
2,50 m	Ref. PAX29250
3,00 m	Ref. PAX29300
4,00 m	Ref. PAX29400
5,00 m	Ref. PAX29500
	Ref. PAXC290
Coupler sets Ref. KX290	